

SAFE. CLEAN. FUTURE-PROOF.


The intelligent fastening solution for secure and long-lasting roof flashings through the waterproofing layer.



INSTALLATION GUIDE

Roof PIN for Concrete or Trapezoidal Steel Deck within the Insulation Layer

1 Vapor Barrier + Roof PIN Base Plate

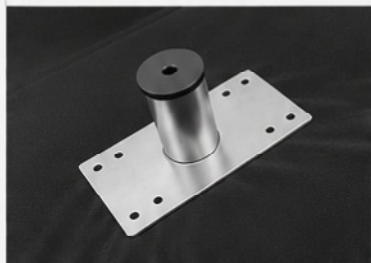


Install the vapor barrier and securely fix the Roof PIN base plate.

2 Insulation Installation and Roof PIN Recess



Install the insulation and create a recess for the Roof PIN.

3 Roof Membrane Installation – Raised Point Visible

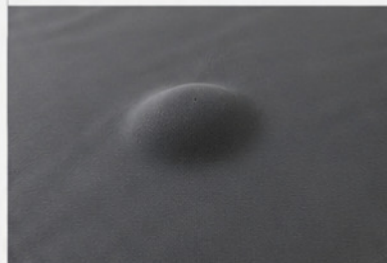

Install the roof membrane. The raised Roof PIN position remains visible.

4 Perforation of the Roof Membrane at the Raised Point



Create an opening in the membrane at the raised point.

5 Installation of the Elastomer Seal



Insert the elastomer sealing element.

6 Installation of the Stainless-Steel Pressure Plate



Install the stainless-steel pressure plate and tighten it using a torque wrench to 50 Nm.



SECURE AND DURABLE WATERPROOFING

Penetrates the waterproofing layer without damaging the membrane, ensuring a permanently watertight installation.



FULL THERMAL SEPARATION

Thermal decoupling minimizes thermal bridges and supports compliance with required thermal performance values.



VERSATILE APPLICATION

Suitable for a wide range of substrates including concrete, timber, and trapezoidal steel decking.



ETA APPROVED

European Technical Assessment
ETA-24/0836 – verified safety, performance, and quality to the highest standards.

More information:

Visit us online:

www.roof-pin.com

Wittenauer GmbH
Am Fuchsgraben 2a
DE-77880 Sasbach
Germany

+49 7841 62180

info@wittenauer-gmbh.de

www.roof-pin.com



ETA-24/0836
European
Technical
Assessment
CE Certified